

LOW COST SYSTEM FOR MEASURING VIBRATIONS THROUGH CAMERAS

DESCRIPTION OF THE TECHNOLOGY

The method is based on searching differences between successive frames and quantifying them. Frames are thresholded at multiple levels and that binary information is tracked at a small region of interest where light intensity variation due to object vibration is expected to happen.

Any movement of the object, even the smallest one, will change the scene brightness distribution and, consequently, the borders in each thresholded level of the digital image. Detection of the changed pixels provides information of movement at a sub-pixel scale. The different signals obtained for each level are composed in order to obtain a single result from the measurement.

The use of low cost cameras produces low-quality images often affected by noise. Nevertheless, the composition of the thresholded images makes the method very robust since the main vibration peak is strongly enhanced while random noise is cancelled out.

Each object is represented in a frame by a succession of illuminated pixels as Fig 2 (a). When an object is moving or vibrating, we can see a change between one frame to the next in the sequence. This change is characterized by pixels that are lighting.

In Fig.2 we can see the same object in a sequence consisting of two consecutive images and a

displacement of 0.25 px.

Fig 2 (b) represents the pixelated image as would be captured by the camera. In Fig 2 (c) the same original scene shown after a displacement of 0.25 px. Note that this small displacement is perfectly noticeable by changes in the contour of the scene. These changes are indicative of the movement.

Furthermore, the accuracy to detect this movement is much less than pixel (sub-pixel accuracy because to detect a change between images is not necessary that the movement of the point represents a complete pixel).

From changes in the binarized image, if the object vibrates a pixel shift will occur with a defined pattern, so that certain pixels turn on and off at regular intervals. Performing a processing of these data can determine the vibration pattern and frequency of it.

Using a software developed by researchers, these calculations can be performed automatically. Inserting video sequence in this software can calculate the frequency of vibration of the objects filmed. This software is easily implemented on any platform and could be adapted to the required application.

MARKET APPLICATION

The method can be applied to any field where non-invasive vibration movement and vibration measurements are needed. In particular researchers suggest acoustics, building, biotechnology, entertainment devices, maintenance, security and surveillance.

The technology has been successfully tested in structural engineering and researchers are actually developing the software for high frequency eye movement detection, which is of fundamental importance in neurology.

MAIN ADVANTAGES AND INNOVATIVE ASPECTS

- Non-contact vibration measuring technique
- No need of using external elements like targets, wired devices, physical probes or optical beams
- Simple and economic setup composed of a low-end camera, and a standard computer.
- Fast and robust.
- Can measure macroscopic and microscopic vibrating objects.
- Simultaneous vibration measurement of different regions and different vibration modes (vibration map)

LOW COST SYSTEM FOR MEASURING VIBRATIONS THROUGH CAMERAS

Among the current methods for measuring vibrations, accelerometers are traditionally preferred. Nevertheless, these methods are contact devices, which may be difficult to use when the specimens not accessible due to the object itself or the surrounding conditions (inaccessibility, damage risk, etc.).

Alternatively to the accelerometers, Doppler vibrometers are often used as non-contact devices. Although they provide very accurate result, they result expensive and non-cost effective for many applications.

Additionally, both of them only provide a single point measurement while our method permits, not only monitoring the process but, with the vibration map, obtaining the vibration frequencies of all vibrating objects in the scene at a glance.

CURRENT STATE OF DEVELOPMENT

The technique has been successfully demonstrated measuring different objects (tuning fork, loudspeaker, pedestrian bridge and tension bars) and comparing results to design parameters and alternative measurements with typical devices.

Experiments have been done with commercial compact pocket cameras costing less than 300 €, capable of acquiring 1000 fps low-resolution videos with AVI-JPEG compression.

INTELLECTUAL PROPERTY RIGHTS



This technology is protected by patent:

- Application number: 201300498
- Application date: 23/05/2013.

COLLABORATION SOUGHT

The research group is looking for companies acquiring this invention for: commercial agreement or technical assistance or manufacturing agreement or technical cooperation or a combination of some of these services.

RELATED IMAGES

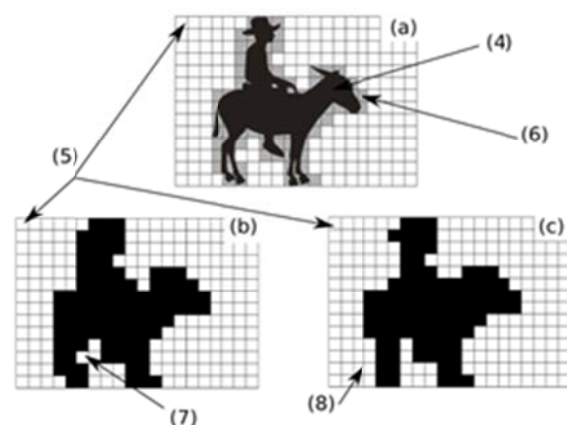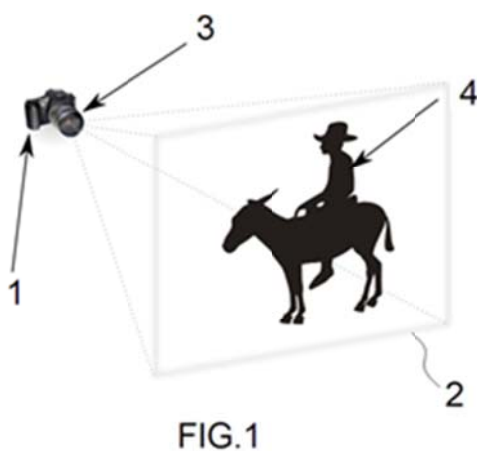

LOW COST SYSTEM FOR MEASURING VIBRATIONS THROUGH CAMERAS

CONTACT DETAILS

Víctor Manuel Pérez Lozano

SGITT-OTRI (Universidad de Alicante)

Phone: +34 96 590 3467

Fax: +34 96 590 3803

E-Mail: otri@ua.es

URL: <http://sgitt-otri.ua.es/es/empresa/ofertas-tecnologicas.html>

